

Technical drawing of a truck chassis, showing side and top views with dimensions in millimeters.

Side View Dimensions:

- Overall length: 12750
- Wheelbase (front to rear axle): 10670
- Front overhang: 1641
- Distance from front axle to rear axle: 9968
- Distance from front axle to rear axle (alternative measurement): 11915
- Distance from front axle to rear axle (alternative measurement): 1805
- Distance from front axle to rear axle (alternative measurement): 2888
- Distance from front axle to rear axle (alternative measurement): 1860
- Distance from front axle to rear axle (alternative measurement): 2150
- Distance from front axle to rear axle (alternative measurement): 4693
- Distance from front axle to rear axle (alternative measurement): 3431
- Distance from front axle to rear axle (alternative measurement): 2985
- Distance from front axle to rear axle (alternative measurement): 2295
- Distance from front axle to rear axle (alternative measurement): 50
- Distance from front axle to rear axle (alternative measurement): A
- Distance from front axle to rear axle (alternative measurement): G
- Distance from front axle to rear axle (alternative measurement): D
- Distance from front axle to rear axle (alternative measurement): E
- Distance from front axle to rear axle (alternative measurement): F
- Distance from front axle to rear axle (alternative measurement): K

Top View Dimensions:

- Overall width: 6500
- Distance from front axle to rear axle: 4875
- Distance from front axle to rear axle: 2435
- Distance from front axle to rear axle: 4545
- Distance from front axle to rear axle: 2765
- Distance from front axle to rear axle: R 12352
- Distance from front axle to rear axle: (R 10447)
- Distance from front axle to rear axle: R 7122
- Distance from front axle to rear axle: R 8422
- Distance from front axle to rear axle: R 5688
- Distance from front axle to rear axle: (R 3492)
- Distance from front axle to rear axle: 6100

Legend:

- roues directrices [] : steering wheels
- chiffres entre crochets () : figures between brackets

- 6 roues directrices []
(chiffres entre crochets)
- Six-wheel steer []
(figures between brackets)


(*) Suspension en position basse
(*) Suspension in lowered position

	A	B	C	D	E	F	G	H	J	K
14.00 R 25	3840	2500	2123	3840	2339	2506	1640	3466	17°	17,5°
16.00 R 25	3890	2660	2233	3890	2389	2556	1690	3516	19°	19°
20.5 R 25	3877	2750	2233	3877	2376	2543	1677	3503	18,5°	18,5°


(*) Suspension en position basse - (*) Suspension in lowered position

TERHELÉSI TÁBLÁZAT


(megengedett terhelés [tonnában])



Teljes kitalpalás



Teljes ellensúly: 8, 35 tonna




		FLECHE ENTIEREMENT TELESCOPIQUE DE 10,5 m A 40 m - FULLY TELESCOPIC BOOM FROM 10.5 m TO 40 m VOLL HYDRAULISCHER AUSLEGER VON 10,5 m BIS 40 m - PLUMA TELESCOPICA DE 10,5 M A 40 M															
		10,5 m	14 m	17,4 m	20,8 m	24,3 m	27,8 m	31,1 m	32,7 m	34,7 m	38 m	40 m					
																	
3	50,00°-45,00°	37,65	33,95	33,55									3				
4	36,50	34,20	32,65	30,30	24,40								4				
5	31,20	29,70	28,25	26,30	22,75	18,85							5				
6	26,10	25,50	24,85	23,20	20,45	17,85	14,70	12,60	9,80				6				
7	21,50	21,10	20,60	20,70	18,25	16,55	14,20	12,00	9,80	8,50			7				
8		17,85	17,35	17,80	16,40	15,05	13,40	11,35	9,55	8,50	7,00		8				
9		15,00	15,30	14,80	14,75	13,55	12,45	10,75	9,40	8,50	7,00		9				
10		13,15	13,45	12,60	12,60	12,40	11,40	9,85	9,20	8,50	7,00		10				
12			10,50	10,80	9,45	9,25	9,45	8,25	7,95	8,10	6,50		12				
14			8,00	8,25	8,10	6,80	7,00	6,95	6,90	7,25	5,90		14				
16				6,45	6,65	5,95	5,65	5,30	5,95	6,10	5,25		16				
18				5,15	5,35	5,25	4,90	4,10	5,15	4,80	4,40		18				
20					4,40	4,55	4,35	3,15	4,20	3,85	3,80		20				
22						3,75	3,85	2,40	3,40	3,10	3,10		22				
24						3,10	3,20	1,80	2,80	2,45	2,50		24				
26							2,65	1,30	2,25	1,95	2,00		26				
28							2,25	0,90	1,85	1,55	1,55		28				
30									1,50	1,15	1,20		30				
32									1,15	0,85	0,85		32				
T2	0	47	0	93	0	93	0	93	0	93	0	100	47	93	100	T2	
T3	0	0	16	0	31	23	47	47	62	70	78	93	93	100	100	T3	
T4	0	0	16	0	31	23	47	47	62	70	78	93	93	100	100	T4	
T5	0	0	16	0	31	0	47	0	62	0	78	0	93	0	93	100	T5

Bővebb információ és megrendelés: 06 30 9 443 817; e-mail: info@gyorfidaru.hu

GÉMKINYÚLÁS

(megengedett terhelés [tonnában])



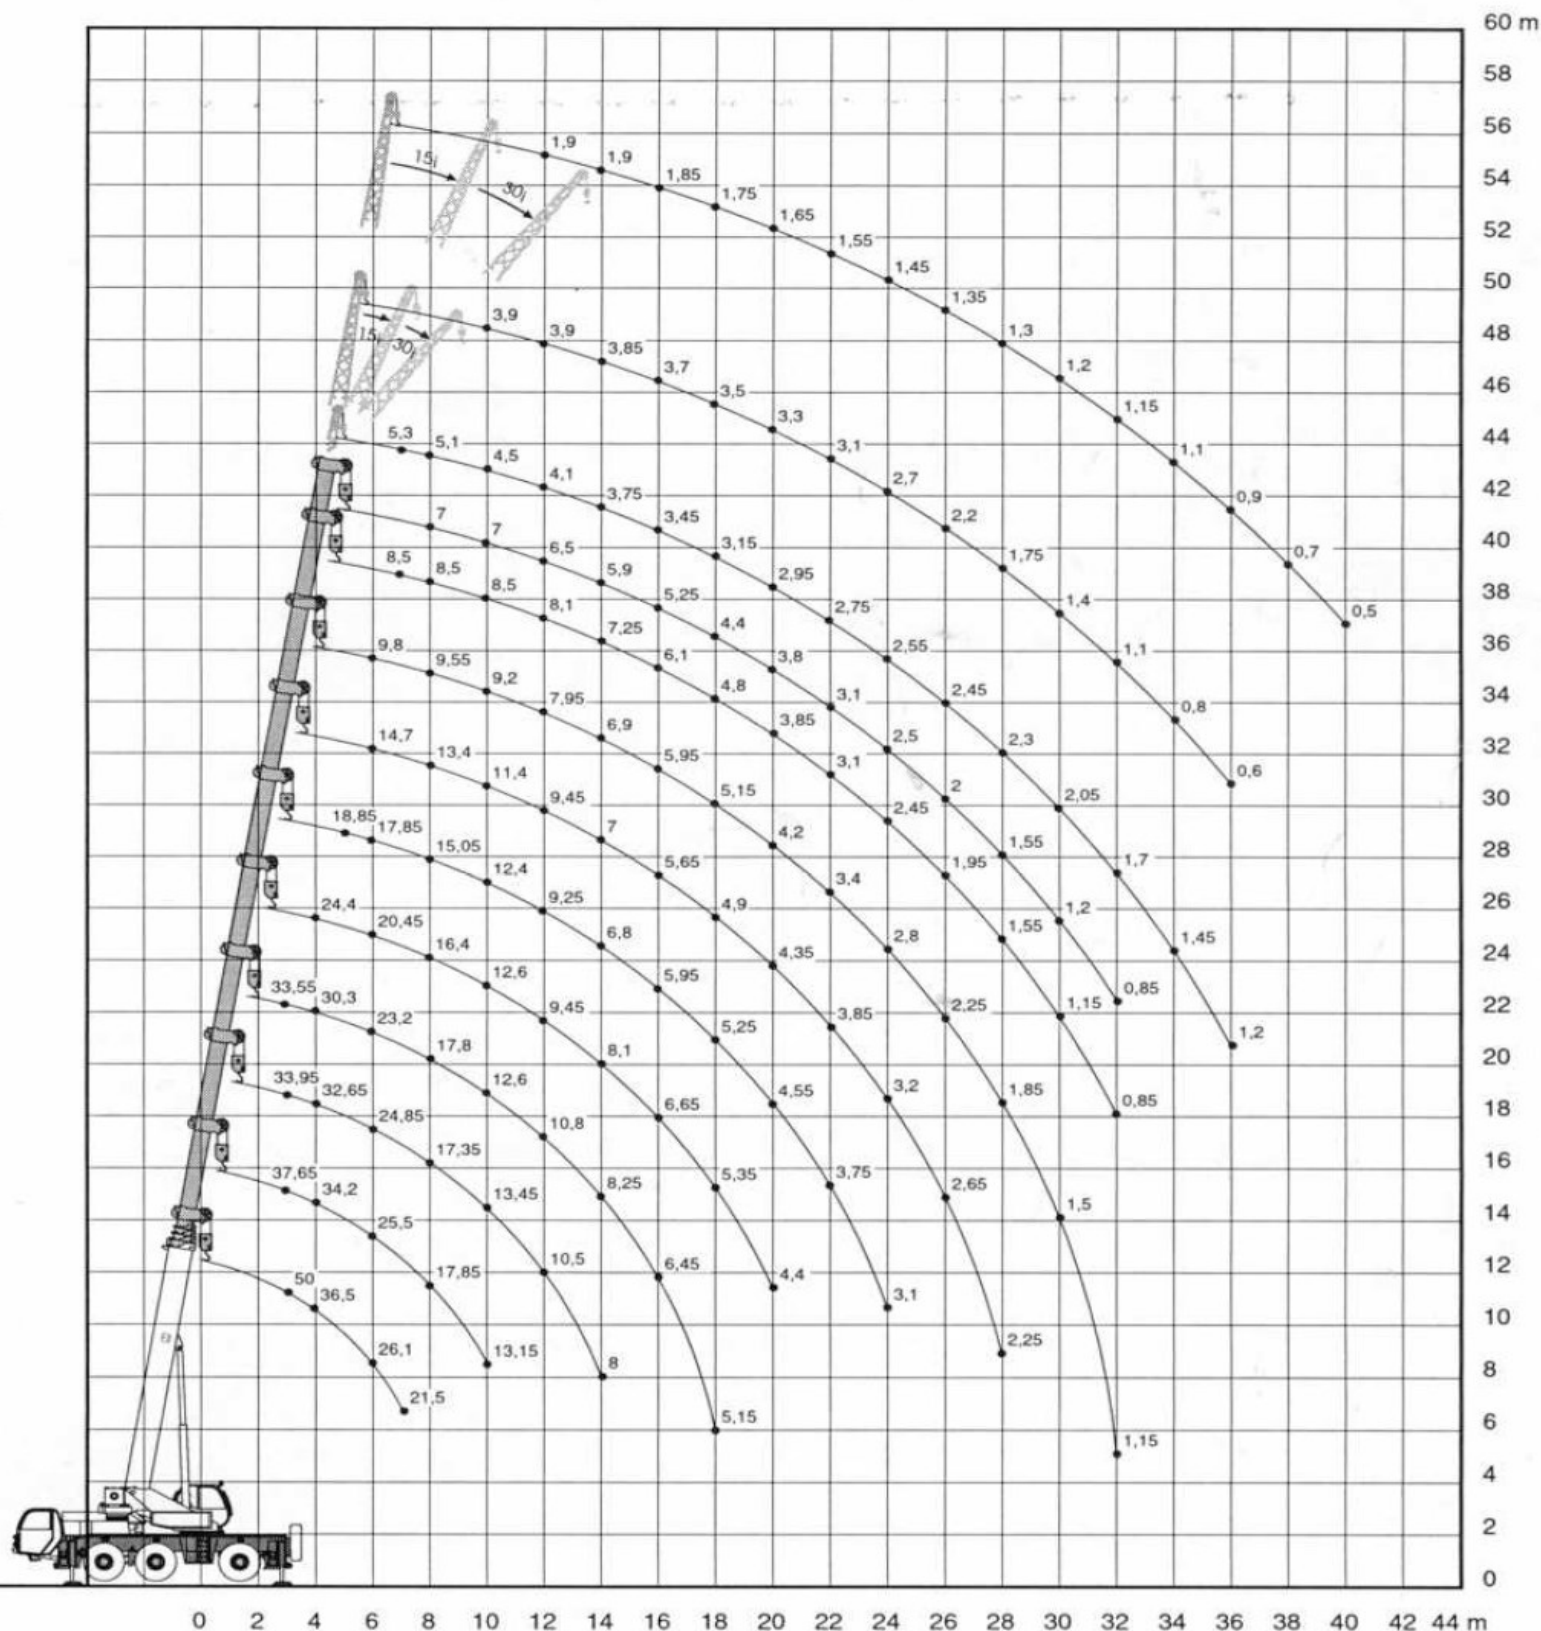


TERHELÉSI TÁBLÁZAT

8 / 15 méteres segédgémmel

(megengedett terhelés [tonnában])

Teljes kitalpalás



8 / 15 méteres segédgémmel

	EXTENSION 8 M / 15 M - 8 M / 15 M EXTENSION VERLÄNGERUNG 8 M / 15 M - PLUMIN DE 8 M / 15 M								
	31,10 m + 8 m	34,7 m + 8 m	40 m + 8 m			40 m + 15 m			
	0°	0°	0°	15°	30°	0°	15°	30°	
7	5,30								7
8	5,10	5,10							8
9	4,80	4,90							9
10	4,50	4,65	3,90						10
12	4,10	4,15	3,90	3,05		1,90			12
14	3,75	3,90	3,85	3,00	2,45	1,90			14
16	3,45	3,55	3,70	2,85	2,35	1,85	1,40		16
18	3,15	3,30	3,50	2,75	2,30	1,75	1,30	1,00	18
20	2,95	3,05	3,30	2,60	2,20	1,65	1,25	1,00	20
22	2,75	2,90	3,10	2,50	2,20	1,55	1,20	1,00	22
24	2,55	2,70	2,70	2,40	2,10	1,45	1,15	0,95	24
26	2,45	2,50	2,20	2,30	2,05	1,35	1,10	0,90	26
28	2,30	2,05	1,75	1,95	2,05	1,30	1,05	0,90	28
30	2,05	1,70	1,40	1,55	1,65	1,20	1,00	0,85	30
32	1,70	1,35	1,10	1,20	1,30	1,15	0,95	0,85	32
34	1,45	1,05	0,80	0,95	1,00	1,10	0,95	0,85	34
36	1,20	0,85	0,60	0,70	0,75	0,90	0,90	0,80	36
38		0,60		0,45	0,50	0,70	0,85	0,80	38
40						0,50	0,65	0,70	40
42							0,50	0,50	42

Bővebb információ és megrendelés: 06 30 9 443 817; e-mail: info@gyorfidaru.hu